


HT 400

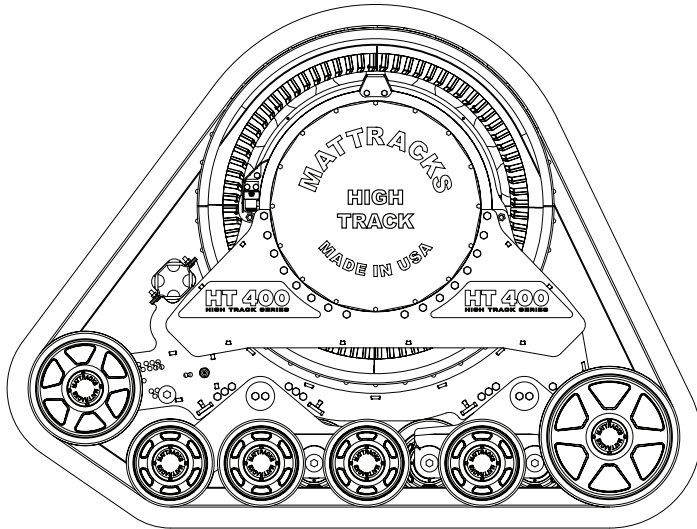

EXCLUSIVE ANTI-TORQUE SYSTEM	Rubber Torsion
FRAME CONSTRUCTION	HSLA Steel
RECOMMENDED MAX GROSS	40,000 lbs
INTERNAL SUSPENSION	Concentric Pivot, w/ Independent Offset Rocker Arm
TRACK TREAD WIDTH	15 in (20 in available)
TREAD STYLE	All-Terrain, Self-Cleaning
TRACK MATERIAL	Rubber with Internal Composite Rods/Cord
RECOMMENDED OPERATING TEMPERATURE	(Ambient) -40° to +130°
AXLE HEIGHT	36.6 in
GROUND CONTACT SURFACE AREA	15 in (Hard Surface) - 3,000 in ² min 15 in (Soft Surface) - 4,740 in ² max 20 in (Hard Surface) - 4,000 in ² min 20 in (Soft Surface) - 6,320 in ² max
CORNERS	4
SPROCKET DIAMETER	38.6 in
WHEELS (SHIELDED & SEALED BEARING)	(4) 4.5"x10", (8) 2.5"x10", (2) 2.5"x16", (2) 2.5"x13" Heavy Duty, Industrial Seals (16/corner, 3 rows)
RECOMMENDED MAX SPEED**	15 mph
TURNING RADIUS	Same as original vehicle
MAX OPERATING SIDE SLOPE (GRADE)*	25%
TERRAIN	All-Terrain Including Hard Surface at GVW
MAX DISTANCE OFF-ROAD	Indefinite
MAX DISTANCE HARD SURFACE**	At Below 80°F (26°C): Indefinite
AT ABOVE 80°F (26°C)	15 Miles at Max Speed

*DEPENDENT ON VEHICLE, CARGO, AND ACCESSORIES **SOME VEHICLES MAY REQUIRE SLIGHT ALTERATIONS
ALL SPECIFICATIONS ARE APPROXIMATE AND WE RESERVE THE RIGHT TO MAKE CHANGES OR MODIFICATIONS WITHOUT NOTIFICATION