


HT 500

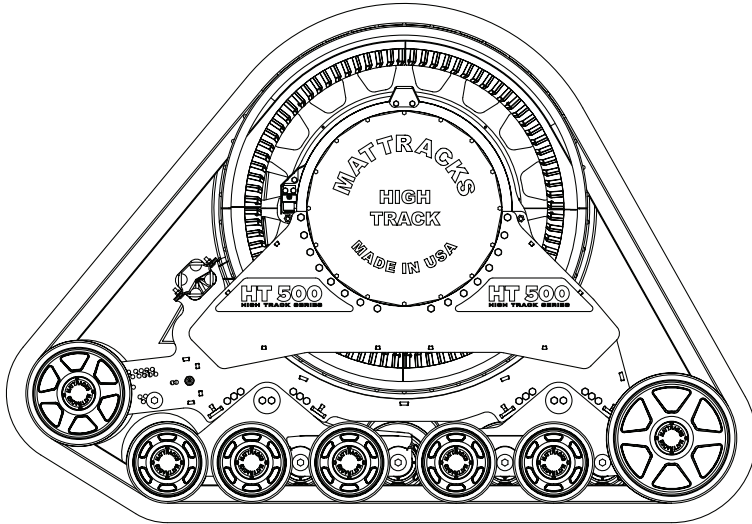

EXCLUSIVE ANTI-TORQUE SYSTEM	Rubber Torsion
FRAME CONSTRUCTION	HSLA Steel
RECOMMENDED MAX GROSS	50,000 lbs
INTERNAL SUSPENSION	Concentric Pivot, w/ Independent Offset Rocker Arm
TRACK TREAD WIDTH	15 in (20 in available)
TREAD STYLE	All-Terrain, Self-Cleaning
TRACK MATERIAL	Rubber with Internal Composite Rods/Cord
RECOMMENDED OPERATING TEMPERATURE	(Ambient) -40° to +130°
AXLE HEIGHT	38.6 in
GROUND CONTACT SURFACE AREA	15 in (Hard Surface) - 3,720 in ² min 15 in (Soft Surface) - 5,532 in ² max 20 in (Hard Surface) - 4,960 in ² min 20 in (Soft Surface) - 7,376 in ² max
CORNERS	4
SPROCKET DIAMETER	47 in
WHEELS (SHIELDED & SEALED BEARING)	4.5" Wide - (5) 10" / 2.5" Wide - (10) 10", (2) 13", (2) 16"
RECOMMENDED MAX SPEED^a	15 mph
TURNING RADIUS	Same as original vehicle
MAX OPERATING SIDE SLOPE (GRADE)^b	25%
TERRAIN	All-Terrain Including Hard Surface at GVW
MAX DISTANCE OFF-ROAD	Indefinite

^a SEE SYSTEM MANUAL FOR FURTHER GUIDANCE ON RECOMMENDED OPERATING SPEEDS - ^b DEPENDING ON VEHICLE, CARGO, AND ACCESSORIES
ALL SPECIFICATIONS ARE APPROXIMATE AND WE RESERVE THE RIGHT TO MAKE CHANGES OR MODIFICATIONS WITHOUT NOTIFICATION